

# Technical Data Sheet

CODE 11334

## MEX 120/5" LL 1S T

Wall axial fans




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Weight (Kg)	0,77
Insulation class	II°	Max airflow at Max speed (l/s)	48,6
IP	45	Max airflow at Max speed (m <sup>3</sup> /h)	175
Max absorbed current at Max speed (A)	0,095	Max pressure at Max speed (mmH2O)	5
Max absorbed power at Max speed (W)	15	Max pressure at Max speed (Pa)	49,04
Max ambient temperature for continuous operation (°C)	50	Max RPM	2075
Nominal diameter (mm)	120	Sound power at Min speed LWA [dB(A)]	52,8
Voltage (V)	220-240	Sound pressure at 3m at Max speed calculated in free field Lp [dB(A)]	32,3

### DIMENSIONS

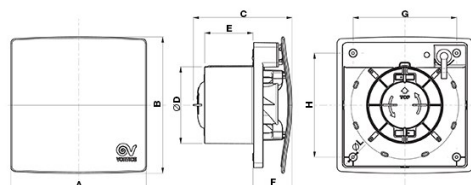

Size A (mm)	193
Size B (mm)	193
Size C (mm)	138
Size D (mm)	Ø 119
Size E (mm)	71
Size F (mm)	53
Size G (mm)	152
Size H (mm)	152
Size L (mm)	Ø 3,5

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 11334

## **MEX 120/5" LL 1S T**

Wall axial fans



---

### DESCRIPTION

- Housings made of shockproof and UV resistant white ABS.
- Nominal diameter 120 mm.
- AC motor equipped with long-life ball-bearings, mixed-flow impellers made of PP resistant to aggressive substances.
- Maximum air flow 175 m<sup>3</sup>/h.
- Timer allowing delayed switch-off function; switch-off delay can be set at installation in a range between 3' and 20'.
- Integrated butterfly back-draught shutter designed to prevent unwanted air inflows when the appliance is switched-off.
- Protection rating IP45, suitable for installation in Zone 1 of bathrooms, as defined by international standard IEC 60364-7.
- IMQ safety certification.

### CURVES

□

#### **PER INFORMAZIONI:**

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)