

Technical Data Sheet

CODE 17143

LINEO 100 Q

Mixed flow extractor fans



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Airflow at 1st speed (l/s)	43,1
Insulation class	II°	Airflow at 1st speed (m³/h)	155
IP	44	Max airflow at Max speed (l/s)	55,6
Max absorbed current at Max speed (A)	0,07	Max airflow at Max speed (m³/h)	200
Max absorbed current at Min speed (A)	0,05	Max pressure at Max speed (mmH2O)	7,5
Max absorbed power (W)	15	Max pressure at Max speed (Pa)	73,6
Max ambient temperature for continuous operation (°C)	60	Max RPM	2450
Nominal diameter (mm)	100	Min RPM	1860
Power absorbed at 1st speed (W)	12	Pressure at 1st speed (mmH2O)	6,5
Voltage (V)	220-240	Pressure at 1st speed (Pa)	63,8
Weight (Kg)	1,25	Sound pressure at 3 m - min speed Lp [dB (A)] 3m - min speed	29,4
		Sound pressure at 3m at Max speed Lp [dB (A)]	37,9

DIMENSIONS

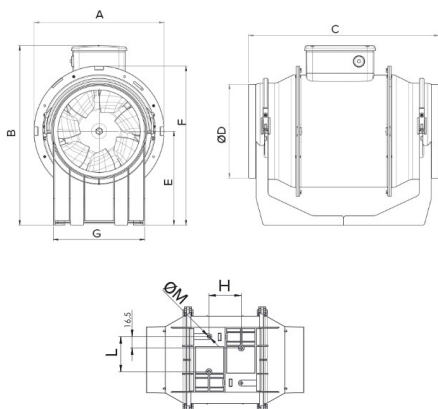

Size A (mm)	156
Size B (mm)	174
Size C (mm)	231
Size D (mm)	∅ 96
Size E (mm)	82
Size F (mm)	152
Size G (mm)	95
Size H (mm)	47,5
Size L (mm)	51,5
Size M (mm)	4,5

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 17143

LINEO 100 Q

Mixed flow extractor fans




DESCRIPTION

- Enclosures made of fire resistant plastic resin, E2 class, according with ISO EN 11925-2: 2010, in areas close to motor and electrical components.
- Nominal diameter 100 mm.
- Induction motor, thermally protected, with shaft mounted on ball

- bearing supports, coupled with a centrifugal impeller.
- High water resistance: IPX5 (if installed in a duct).
- Speed adjustable through Vortice speed devices.

CURVES

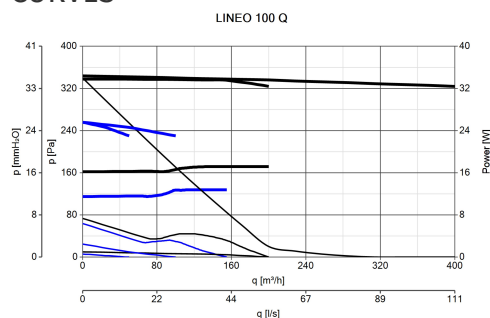

ACCESSORIES



C TEMP

Code 12992



C SMOKE

Code 12993




C HCS

Code 12994



C PIR

Code 12998



C TIMER

Code 12999



KIT SCB (TRASF.E.C.)

Code 22481



C 1.5 (COMANDO EL. 1.5 A)

Code 12966



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

NEO-G 100

le 22701



DUO

Code 22914