

# Technical Data Sheet

CODE 11103

## MG 120/5" T LL

In-line axial fans



### Certifications



IMQ



CE



IMQ Performance



EAC




UKCA

### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,12	Weight (Kg)	0,56
Absorbed Power max (W)	20	Delivery max (l/s)	44,4
Frequency (Hz)	50	Delivery max (m <sup>3</sup> /h)	160
Insulation Class	II°	Pressure max (mmH2O)	4,5
IP	X4	Pressure max (Pa)	44
Max ambient temperature for continuous operation (°C)	50	RPM	2250
Voltage (V)	220-240	Sound Pressure level Lp [dB (A)] 3m	43

### DIMENSIONS

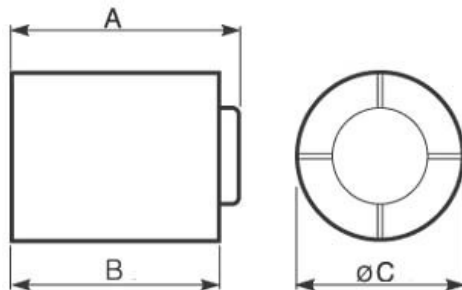

Size A (mm)	Ø 119
Size B (mm)	107,5
Size C (mm)	100

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** prevendita@vortice-italy.com

# Technical Data Sheet

CODE 11103

## MG 120/5" T LL


In-line axial fans



### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 160 m<sup>3</sup>/h.
- Equipped with electronic timer designed to shut off the motor automatically after a set interval, selectable during installation in the range 3'-20' (default setting 3').
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.

### ACCESSORIES



### STAFFA PER SOTTOTETTO/SOFFITTO D.120

Code 22260

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)