Technical Data Sheet

CODE 12615

VORTICE 150/6" AR-LL-S

Wall/window axial fans

Certifications

IMQ

CE

IMQ Performance

C Tick Mark

EAC

G-Mark

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60
Inlet	Automatico
Insulation class	II°
IP	X4
Max absorbed current (A)	0,17
Max absorbed power (W)	35
Max absorbed Power at 60 Hz (W)	35
Max ambient temperature for continuous operation (°C)	50
Max room temperature for continuous operation at 60 Hz (°C)	50
Ø Discharge hole (mm)	150

Voltage (V)	220-240
Weight (Kg)	2,07
Max airflow - extract (l/s)	105,6
Max airflow - extract (m3/h)	380
Max airflow - intake (l/s)	59,7
Max airflow - intake (m3/h)	215
Max airflow (m^3/h)	380
RPM	2110
Rpm - exhaust	2110
Rpm - supply	2520
Sound pressure Lp [dB (A)] at 3 m	49,6

DIMENSIONS

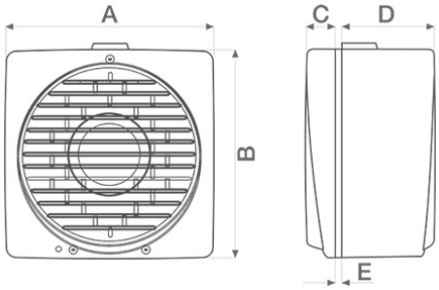

Ø hole thorugh the glass	185/190
Ø hole through the wall	185/190
Size A (mm)	215
Size B (mm)	218
Size C (mm)	31
Size D (mm)	97,5
Size E (mm)	2/38

PER INFORMAZIONI:
Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 12615

VORTICE 150/6" AR-LL-S

Wall/window axial fans

DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

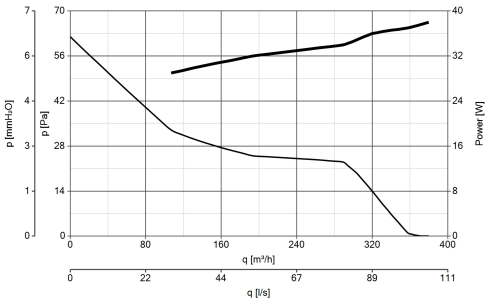

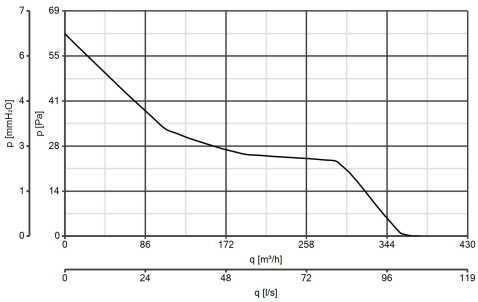

ACCESSORIES



KIT TE 150/6" (TORRETTA)
Code 13001

KIT MU (MURO)
Code 13018

KIT VV 150/6" (DOPPI VETRI)
Code 13021

KIT FF 150/6" (DOPPIA FINESTRA)
Code 13024

CR5N
Code 12941

CR5
Code 12943

CREN
Code 12944

C TIMER

PER INFORMAZIONI:
Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com

C PIR
Code 12998

C TIMER
Code 12999