

# Technical Data Sheet

CODE 12456

## VORTICE 230/9" ARI-LL-S

Flush mounted axial fans



### Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Voltage (V)	220-240
Inlet	Automatico	Weight (Kg)	3,88
Insulation class	II°	Max airflow - extract (l/s)	188,9
IP	X4	Max airflow - extract (m <sup>3</sup> /h)	680
Max absorbed current (A)	0,19	Max airflow - intake (l/s)	97,2
Max absorbed power (W)	35	Max airflow - intake (m <sup>3</sup> /h)	350
Max absorbed Power at 60 Hz (W)	40	Max airflow (m <sup>3</sup> /h)	680
Max ambient temperature for continuous operation (°C)	50	RPM	1160
Max room temperature for continuous operation at 60 Hz (°C)	50	Rpm - exhaust	1160
Ø Discharge hole (mm)	335 ÷ 340	Rpm - supply	1260
		Sound pressure Lp [dB (A)] at 3 m	45,3

### DIMENSIONS

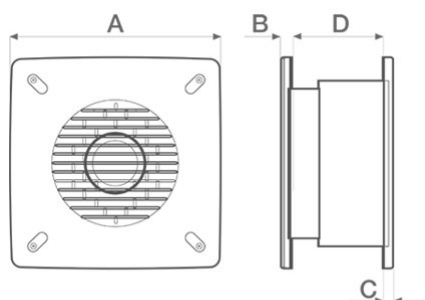

Ø hole through the wall	335/340
Size A (mm)	400
Size B (mm)	400
Size C (mm)	11
Size D (mm)	180

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 12456

## VORTICE 230/9" ARI-LL-S


Flush mounted axial fans




### DESCRIPTION

- Model designed for installation recessed into wall.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight)
- Nominal diameter 230 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

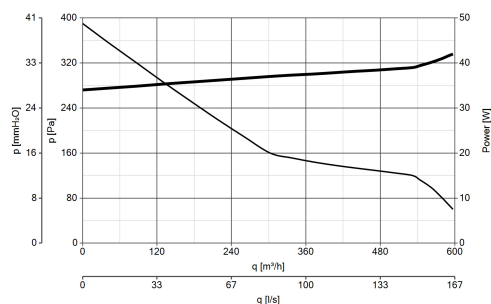


### ACCESSORIES



#### KIT TE 230/9" (TORRETTA)

Code 13002




#### KIT SO (SOFFITTO)

Code 13012



#### KIT ML 230/9" (MURO-LARGO)

Code 13016



#### KIT TC 230/9" (TETTO CON CONDOTTO)

Code 13028



#### CR5N

Code 12941



#### CREN

Code 12944



#### C PIR

Code 12998

#### C TIMER



#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premeendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

**C TIMER**

Code 12999

**C TEMP**

Code 12992

**C SMOKE**

Code 12993

**C HCS**

Code 12994