

Technical Data Sheet

CODE 12415

VORTICE 300/12" AR-LL-S

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



C Tick Mark




EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Weight (Kg)	6,13
Insulation class	II°	Max airflow - extract (l/s)	458,3
IP	X4	Max airflow - extract (m3/h)	1650
Max absorbed current (A)	0,41	Max airflow - intake (l/s)	255,6
Max absorbed power (W)	75	Max airflow - intake (m3/h)	920
Max absorbed Power at 60 Hz (W)	90	Max airflow (m³/h)	1650
Max ambient temperature for continuous operation (°C)	50	RPM	1215
Max room temperature for continuous operation at 60 Hz (°C)	40	Rpm - exhaust	1215
Ø Discharge hole (mm)	300	Rpm - supply	1280
Voltage (V)	220-240	Sound pressure Lp [dB (A)] at 3 m	53,6

DIMENSIONS

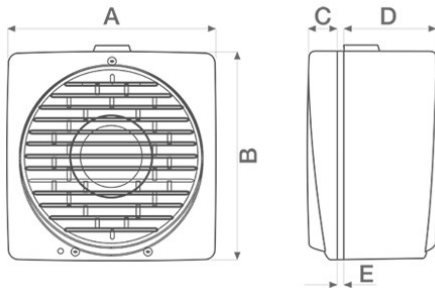

Ø hole through the glass	324/329
Ø hole through the wall	324/329
Size A (mm)	390
Size B (mm)	393
Size C (mm)	31
Size D (mm)	147
Size E (mm)	2/38

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 12415

VORTICE 300/12" AR-LL-S


Wall/window axial fans




DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 300 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

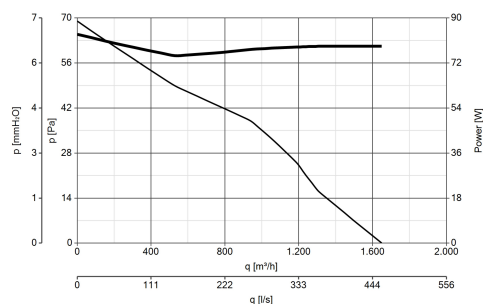

ACCESSORIES



KIT TE 300/12" (TORRETТА)

Code 13003



KIT MU (MURO)

Code 13018



KIT WV 300/12" (DOPPI VETRI)

Code 13023



KIT FF 300/12" (DOPPIA FINESTRA)

Code 13026



CREN

Code 12944



C PIR

Code 12998



C TIMER

Code 12999



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premeendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

CR5N

Code 12941

C TEMP

Code 12992

C SMOKE

Code 12993

C HCS

Code 12994



KIT TC 300/12"
(TETTO CON
CONDOTTO)

Code 13029