

Technical Data Sheet

CODE 11102

MG 120/5" LL

In-line axial fans



Certifications



IMQ



CE



IMQ Performance



EAC



G-Mark




UKCA

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,12	Weight (Kg)	0,56
Absorbed Power max (W)	20	Delivery max (l/s)	44,4
Frequency (Hz)	50	Delivery max (m ³ /h)	160
Insulation Class	II°	Pressure max (mmH ₂ O)	4,5
IP	X4	Pressure max (Pa)	44
Max ambient temperature for continuous operation (°C)	50	RPM	2250
Voltage (V)	220-240	Sound Pressure level L _p [dB (A)] 3m	43

DIMENSIONS

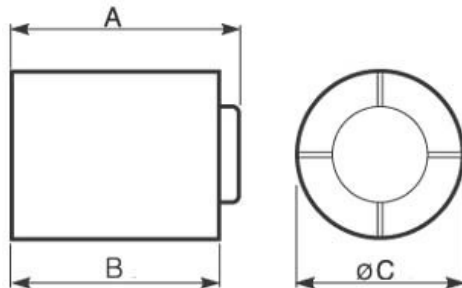

Size A (mm)	Ø 119
Size B (mm)	103
Size C (mm)	100

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11102

MG 120/5" LL

In-line axial fans



DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 160 m³/h.
- IMQ SAFETY and IMQ PERFORMANCE certifications
- Vortice speed controllers.

ACCESSORIES




C 1.5
(COMANDO EL.
1.5 A)

Code 12966



SCNRB
SCAT.COM.NON
REV.INCASSO

Code 12971



STAFFA PER
SOTTOTETTO/SOFFITTO
D.120

Code 22260

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com