

# Technical Data Sheet

CODE 12455

## VORTICE 230/9" AR-LL-S

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50-60	Voltage (V)	220-240
Inlet	Automatico	Weight (Kg)	3,45
Insulation class	II°	Max airflow - extract (l/s)	194,4
IP	X4	Max airflow - extract (m3/h)	700
Max absorbed current (A)	0,19	Max airflow - intake (l/s)	102,8
Max absorbed power (W)	35	Max airflow - intake (m3/h)	370
Max absorbed Power at 60 Hz (W)	40	Max airflow (m <sup>3</sup> /h)	700
Max ambient temperature for continuous operation (°C)	50	RPM	1200
Max room temperature for continuous operation at 60 Hz (°C)	50	Rpm - exhaust	1200
Ø Discharge hole (mm)	230	Rpm - supply	1300
		Sound pressure Lp [dB (A)] at 3 m	43,6

### DIMENSIONS

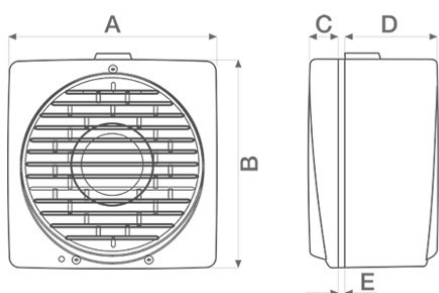

Ø hole through the glass	257/262
Ø hole through the wall	257/262
Size A (mm)	294
Size B (mm)	297
Size C (mm)	31
Size D (mm)	130
Size E (mm)	2/38

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 12455

## VORTICE 230/9" AR-LL-S


Wall/window axial fans




### DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 230 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

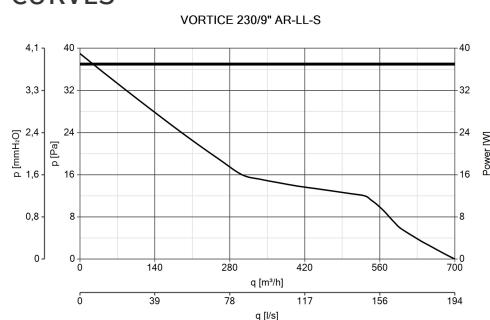

### ACCESSORIES



#### KIT TE 230/9" (TORRETTA)

Code 13002



#### KIT SA 230/9" (SCHERMO ANTILUCE)

Code 13004



#### KIT MU (MURO)

Code 13018



#### KIT VV 230/9" (DOPPI VETRI)

Code 13022



#### KIT FF 230/9" (DOPPIA FINESTRA)

Code 13025



#### CR5N

Code 12941



#### CREN

Code 12944



C TIMER



#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premando 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

**C PIR**

Code 12998



**C HCS**

Code 12994

**C TIMER**

Code 12999

**C TEMP**

Code 12992

**C SMOKE**

Code 12993



**KIT TC 230/9"**  
**(TETTO CON**  
**CONDOTTO)**

Code 13028